# Thruster Brakes Eldro (SMD 380-80)



#### **Brake Features**

- SMD Thruster brakes are steel fabricated frames with Eldro Thruster.
- Robust and rugged design to withstand arduous environment in steel, Rolling Mills, Elevators, Lifts Cements and other heavy engineering plants.
- Excellent designs & good manufacturing process ensure a reliable product.
- Consistent braking torque due to selected and tested brake lining material.( asbestos free)
- The design ensures efficient distribution of forces.
- Ease Of maintenance and replacement of brake shoe without dismounting the brake.
- Compact designs and elegant aesthetic looks.


#### **Technical Data**


1 COMMON BUILD		
Item	Brake	Thruster
Model	SMD 380-80	Eldro 80-6
Lifting Force	-	800N/80 Kg
Drum Dia.	380 mm	-
Breaking Torque	180 Kg-m	-
Stroke	-	60 mm
Oil Capacity	-	5.5 Liters
Rated Voltage	-	415 VAC, 3ø Ph
Ingress Protection	-	IP 65 ( IS/IEC -60529(2001)
Operating Temperature	-	+50° C
Power at	-	330 Watt
Weight	85 Kg	24 Kg
Current At 415 VAC	-	1.2 Amps



### **Thruster Specifications**

The centrifugal pump and motor are immune from external overloading. Standard motor design is suitable for 415 Volts / 50 Hz / 3-Phase supply. Other voltage and frequencies can be offered against request. The star connected, Class F windings have internal star point, and the three supply phases can be connected on the terminal board, irrespective of the phase sequence. The bi-directional radial flow impeller works with equal performance efficiency in both directions.

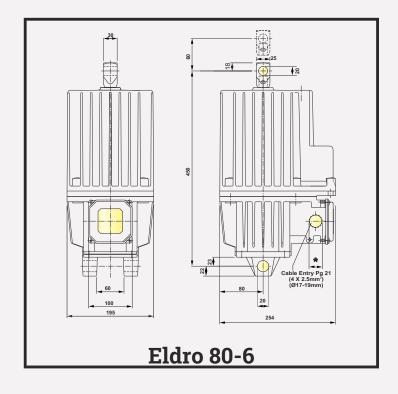

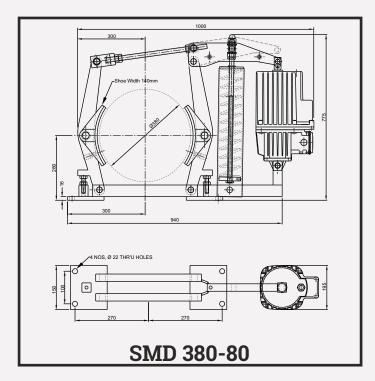

## Speed-O-Controls Pvt. Ltd.

H. O. Unit -I: C-15/16, Nand Jyot Industrial Estate, Andheri-Kurla Road, Mumbai - 400072, Tel: (022) 42469700-30 Fax: (022) 42469797 E-mail: sales@socgroup.in

Unit - II: Plot No. 4912, G. I. D. C.,

E-mail: sales.amd@socgroup.in

Phase IV, Vatva, Ahmedabad - 382445 Tel.: (079) 40083201/2/3/4, Fax: (079) 25841056,

Visit us at : www.speedocontrols.com www.socremote.com

July, 2017