

Master Controller(IP-54)



Introduction

Master Controller is housed in enclosure and provided with an easily removable cover with ample area for maintenance. The cam shaft is mounted on bearing bushes on walls of housing. The Cam are made of thermoplast material and fixed on square spindle switch which is moved by a handle. The cams are cut to correspond to the switching program Aluminium die cast Powder Coated Suitable for Hoist-Grab, Mill duty, E. O. T. Cranes and Rolling mill drives.


Technical Data

Body Material	Aluminium Die Cast
Protection Degree	IP - 54(IS/IEC-60529(2001)
Mounting Position	Horizontal
Contact Material	Silver Cadmium
Rated Voltage	500 V. A. C.
Thermal Test Current	40Amps.
Cable Entries	2 x 20, 2 x 26 standard conduit
Input Speed	1200 RPM, Maximum
Contacts	Single break
No. Of Contacts	24 maximum
No. Of Steps	6-0-6 maximum
Optional	Spring return/deadman's handle arrangement



Aluminium Die Cast

Type	Dimension Details					
	A	B	C	No. Of Contacts	No. Of Cable Entries	
					Dia 20	Dia 25
Small	170	220	150	8	1	1
Medium	267	317	245	16	2	2
Big	370	420	140	24	2	2

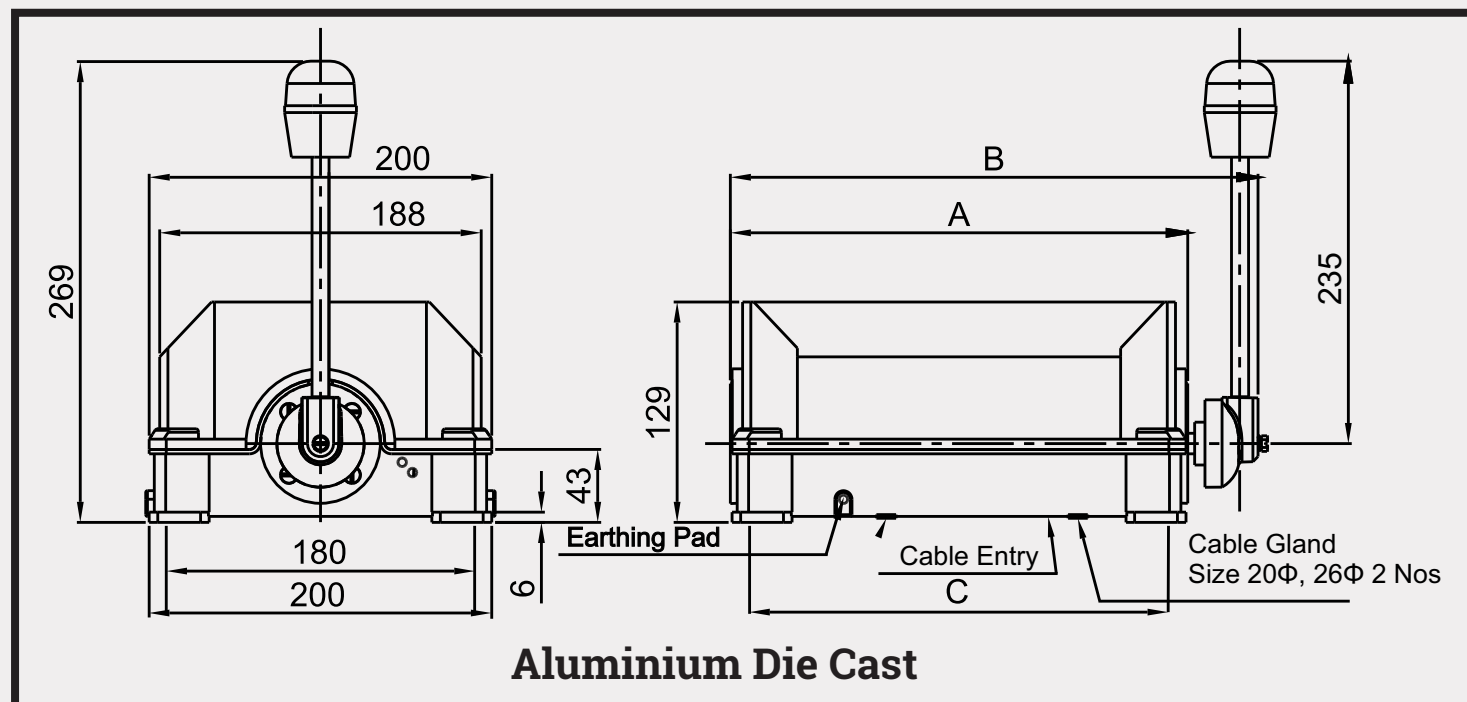

Aluminium Die Cast

Speed-O-Controls Pvt. Ltd.

H. O. Unit - I : C-15/16, Nand Jyot
Industrial Estate, Andheri-Kurla
Road, Mumbai - 400072 .

Tel : (022) 42469700-30

Fax : (022) 42469797

E-mail : sales@socgroup.in

Unit - II: Plot No. 4912, G. I. D. C.,
Phase IV, Vatva,
Ahmedabad - 382445

Tel.: (079) 40083201/2/3/4,

Fax : (079) 25841056,

E-mail : sales.amd@socgroup.in

Visit us at :

www.speedocontrols.com

www.socremote.com

October 2019-V-3