


# DSL Indicating Lamp



## Introduction

In DSL Busbar System to protect crane from single phasing we have come out with phase indicator system. **Speed-O-Controls Pvt. Ltd.**, a leading DSL Lamp Indicator manufacturer, from Mumbai, Maharashtra India. We have used best quality L.E.D. Indicator Lamps with proper heat sink to obtain long life from the indicator the body of the indicator is powder coated this system are supplied with long wire which can be directly connected to bus bar or panel board of crane this indicator can also been used in factories or on machine to show phase failure.

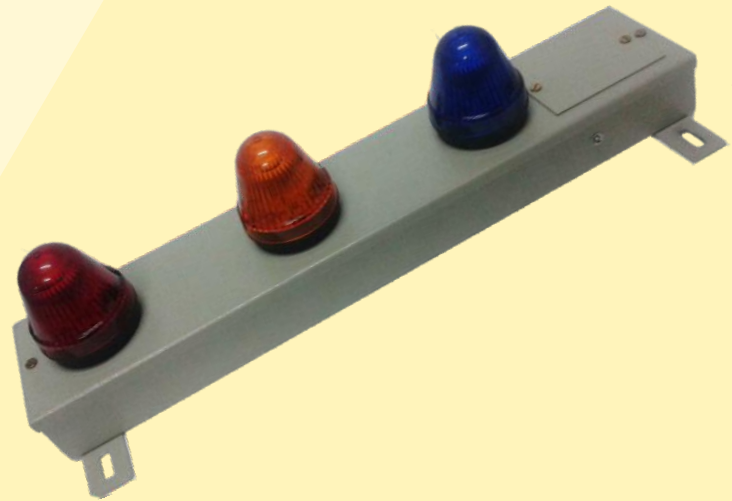

## Technical Data

Specification	Data
Power supply	3-phase 3-wire star connected power supply
Power consumption	4 Watts
Indication color	Red, Yellow & Blue
Visibility	200-300 Meters
Body	Metallic, Siemens Grey Powder Coated.
Installation	On 4-Screws ____mm size
Size	PCB diameter 64mm
Light Source	Light Emitting Diode
Color rendering Index	98 CRI
Luminous Intensity	3000 Mcd
LED size	L=5.6mm, W=3.0mm
No. of LED's per Indicator	46-LED's
Working Voltage	26 Volt's DC
Max Input Voltage	Three phase Three wire 460 Volts AC
Input Volts	Three phase Three wire 415 Volts AC
Type of power supply	3-Phase Transformer less Capacitive power supply
Life expectancy	5-Year's
Operating temperature	- 20° C to + 85° C

## Indication Lamp Diagram

